

FORM PTO-1390  
(REV. 11-2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

11694-04132

TRANSMITTAL LETTER TO THE UNITED STATES  
DESIGNATED/ELECTED OFFICE (DO/EO/US)  
CONCERNING A FILING UNDER 35 U.S.C. 371

U.S. APPLICATION NO. (If known, see 37 CFR 1.5

not yet assigned  
09/890027

INTERNATIONAL APPLICATION NO.

PCT/US00/03926

INTERNATIONAL FILING DATE

15/02/00

PRIORITY DATE CLAIMED

15/02/99

TITLE OF INVENTION

Multi-Color Change Device with Conductive Coating Material for Electrostatic Coating

APPLICANT(S) FOR DO/EO/US

Shigeru Kobayashi; Hidetaka Tsukamoto; Nobuo Ikeda

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☐ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
  - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ has been communicated by the International Bureau.
  - c. ☒ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
  - a. ☐ is attached hereto.
  - b. ☒ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
  - a. ☐ are attached hereto (required only if not communicated by the International Bureau).
  - b. ☐ have been communicated by the International Bureau.
  - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
  - d. ☒ have not been made and will not be made.
8. ☐ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).
9. ☒ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

"Express Mail" Mailing Label Number EL084648106US

Items 11 to 20 below concern document(s) or information included:

Date of Deposit July 24, 2001

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A substitute specification.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☒ Other items or information:  
Amendment Under Article 34 and Letter Accompanying Amendment Under Article 34 (6 pages)

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail, Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D. C. 20231.

Candice Moore  
(Typed or printed name of Sender)

Candice Moore  
(Signature)

U.S. APPLICATION NO. **09/890027**  
not yet assignedINTERNATIONAL APPLICATION NO.  
PCT/US00/03926ATTORNEY'S DOCKET NUMBER  
11694-0413221. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):**Neither international preliminary examination fee (37 CFR 1.482)  
nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO  
and International Search Report not prepared by the EPO or JPO. .... \$1000.00International preliminary examination fee (37 CFR 1.482) not paid to  
USPTO but International Search Report prepared by the EPO or JPO ..... \$860.00International preliminary examination fee (37 CFR 1.482) not paid to USPTO  
but international search fee (37 CFR 1.445(a)(2)) paid to USPTO ..... \$710.00International preliminary examination fee (37 CFR 1.482) paid to USPTO  
but all claims did not satisfy provisions of PCT Article 33(1)-(4) ..... \$690.00International preliminary examination fee (37 CFR 1.482) paid to USPTO  
and all claims satisfied provisions of PCT Article 33(1)-(4) ..... \$100.00**ENTER APPROPRIATE BASIC FEE AMOUNT =**

CALCULATIONS PTO USE ONLY

\$ 860.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(e)).

\$

CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$
Total claims	11 - 20 =		x \$18.00	\$
Independent claims	2 - 3 =		x \$80.00	\$
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$270.00	\$
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$ 860.00

☐ Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above  
are reduced by 1/2. +**SUBTOTAL =**

\$ 860.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30  
months from the earliest claimed priority date (37 CFR 1.492(f)).

\$

**TOTAL NATIONAL FEE =**

\$ 860.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be  
accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +

\$ 40.00

**TOTAL FEES ENCLOSED =**

\$ 900.00

Amount to be  
refunded:

\$

charged:

\$

a. ☒ A check in the amount of \$ 900.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_ to cover the above fees.  
A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any  
overpayment to Deposit Account No. 03-0172. A duplicate copy of this sheet is enclosed.d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card**  
information should not be included on this form. Provide credit card information and authorization on PTO-2038.**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR  
1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Ronald D. Gutt  
Calfee, Halter & Griswold LLP  
800 Superior Avenue Suite 1400  
Cleveland OH 44114

SIGNATURE

RONALD D. GUTT

NAME

43,650

REGISTRATION NUMBER

CERTIFICATE OF MAILING

This certifies that this document is being deposited with the U.S. Postal Service on this date July 24, 2001 in an envelope Express Mail Post Office to Addressee service under 37 C.F.R. 1.10, Mailing Label No. EL084648106US addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.

By: Candice Moore

Candice Moore  
(Signature)

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of Kobayashi, et al. )  
Serial No.: Not yet assigned ) Examiner: Not yet assigned  
Filed: Herewith ) Group: Not yet assigned  
For: MULTI-COLOR CHANGE ) Priority: PCT/US00/03926  
DEVICE WITH CONDUCTIVE )  
COATING MATERIAL FOR )  
ELECTROSTATIC COATING )  
Attorney Docket No.: )  
11694-04132 )

**PRELIMINARY AMENDMENT**

Asst. Commissioner of Patents  
Washington, D.C. 20231

Dear Sir:

Please add the following as a Preliminary Amendment as the first paragraph of the specification, immediately after the title:


--Related Applications

This application is a national phase entry under 35 U.S.C. §371 of PCT application number PCT/US00/03926, filed February 15, 2000, which designated the U.S., which claims priority under 35 U.S.C. §119, to Japanese application serial number 11-076290, filed February 15, 1999, both applications of which are fully incorporated by reference herein.--

If there are any fees due in connection with this matter, please charge our deposit account 03-0172.

Date 7/24/01

Respectfully submitted,



Ronald D. Gutt, Reg. No. 43,650  
CALFEE, HALTER & GRISWOLD LLP  
800 Superior Avenue  
Cleveland, Ohio 44114  
(216) 622-8690

FILED 7/24/01 2:00 PM

09/890027

PTO Rec'd 24 JUL 2004

COLOR CHANGING APPARATUS FOR ELECTRICALLY CONDUCTIVE COATING MATERIAL  
COMPRISING MOVABLE CONDUIT JOINTField of the Invention

The present invention relates to a color changing apparatus for multiple color electrostatic coating which is performed with a conductive coating material such as an aqueous coating material using an electrostatic coating spray gun supplied with a high voltage. More specifically, the present invention relates to a color changing apparatus for multiple color electrostatic coating of conductive coating material, for realizing easy maintenance of a system other than the system which is being used for coating without being influenced by a high voltage applied and for facilitating color changing.

Background of the Invention

An electrostatic coating method is a technique for applying a high voltage (generally, 80 to 125 kV) to a corona pin provided in a coating material spray gun and electrostatically charging the coating material which is sprayed from the spray gun to a high potential so as to apply the coating material on a surface of a subject of coating which is grounded. Accordingly, when a conductive coating material based on a conductive solvent such as water, methanol or the like is used, a conductive path is formed by the conductive coating material from the spray gun to a coating tank through a coating material supply line. The coating material supply system including the coating material tank and a pump needs to be insulated from the ground since otherwise the high voltage is grounded through the coating material supply line and thus cannot be applied to the corona pin provided on the spray gun.

In such an apparatus, high potential electrostatic charges are accumulated in all the devices from the spray gun and the coating material supply system. It is very dangerous if the operator inadvertently contacts a device in the coating material supply system having such a large discharge energy accumulated therein. Therefore, the coating material cannot even be supplemented to the coating material tank while the apparatus is in operation. In the case where a color changing apparatus for multiple color coating has a structure in which a plurality of coating material supply systems respectively for multiple colors are directly

connected to one another through a switching valve or the like, electrostatic charges are accumulated. through a switching valve. even in a coating material supply system for a color other than the color which is in use. Thus, the degree of danger is increased, and the coating material cannot be supplemented even to a coating material tank for a color other than the color which is in use.

As a method for alleviating these problems regarding color changing for multiple color coating, technologies described In Japanese Laid-Open Publication Nos. 4-200663 and 4-200664 are proposed. The technology disclosed in Japanese Laid-Open Publication Nos. 4-200663 will be first described. An electrostatic coating apparatus for conductive coating material which is used for applying a conductive coating material by an electrostatic coating machine supplied with a high voltage is disclosed. A plurality of pumps are provided in an electrically insulating state, the plurality of pumps having a coating material inflow opening and a coating material outflow opening through which a required amount of conductive coating material introduced through the coating material inflow opening is pushed out by pressure at a prescribed flow rate in accordance with the coating material discharge amount of the electrostatic coating machine. Detachably connected to the coating material inflow opening of each of the pumps is a coating material supply pipe, which is connected to a respective color changing valve apparatus including a cleaning air supply valve and a cleaning liquid supply valve. The coating material outflow opening of each pump is connected to a switching valve for communicating the coating material outflow opening to an outflow path on the electrostatic coating machine side or to an outflow path on the exhaust liquid tank side. Each exhaust liquid pipe connected to the exhaust liquid tank is detachably connected to the outflow path on the exhaust liquid tank side.

The technology disclosed in Japanese Laid-Open Publication Nos. 4-200664 will be described. An electrostatic coating apparatus for conductive coating material which is used for coating a conductive coating material by an electrostatic coating machine supplied with a high voltage is disclosed. A plurality of coating material pressure-supply tanks for pushing out a required amount of conductive coating material stored therein by air pressure and supplying a constant amount of the conductive coating material to the electrostatic coating machine, and a cleaning liquid pressure-supply tank for pushing out a required amount of cleaning liquid stored therein by air pressure and supplying the cleaning liquid to the electrostatic coating machine are provided in an electrically insulating manner. The coating material pressure-supply tanks and the cleaning liquid pressure-supply tank are connected to the respective color changing valves provided in parallel to a manifold communicated to the

electrostatic coating machine. The coating material pressure-supply tanks are each provided with a coating material supplement opening, and the cleaning liquid pressure-supply tank is provided with a cleaning liquid supplement opening. The coating material supplement opening is detachably connected to a supply pipe for supplying a conductive coating material of a corresponding color, and the cleaning liquid supplement opening is detachably connected to a cleaning liquid supply pipe.

The above-described conventional technologies, i.e., the technologies disclosed in Japanese Laid-Open Publication Nos. 4-200663 and 4-200664 have the following problems. The technology disclosed in Japanese Laid-Open Publication No. 4-200663 has the problems that the circuit is relatively complicated and accordingly the operation is relatively troublesome; and each coating material supply system requires two separate mechanisms of a coating material supply system and an exhausted liquid system. The technology further has the following problem. Although not clear from the publication or the figures, a conductive path is formed, through the conductive coating material, in a plurality of coating material supply systems (i.e., pumps, coating material tanks and the like) respectively connected to color changing valves (CV<sub>1</sub> through CV<sub>3</sub>) of color changing valve devices (9A, 9B, 9C) while the systems are in use (i.e., connected to the electrostatic coating machine). Therefore, none of the color coating materials can be supplemented due to the possible danger of high potentials. Therefore, before supplementing the coating materials, the coating operation needs to be stopped so as to shield the high voltage.

The technology disclosed in Japanese Laid-Open Publication No. 4-200664 also has the following problem. A conductive path is formed, through the conductive coating material or the cleaning liquid, even in a plurality of coating material pressure-supply systems (1A, 2B, 2C) and the cleaning liquid pressure-supply tank (3) while coating is performed. Therefore, none of the color coating materials can be supplemented due to the possible danger of high potentials. Therefore, before supplementing the coating materials, the coating operation needs to be stopped so as to shield the high voltage.

### **Summary of the Invention**

The present invention made in light of the above-described problems has an objective of providing a color changing apparatus for multiple color electrostatic coating of conductive coating material, which has a relatively simple structure and realizes a relatively simple operation; which separates coating material supply systems other than the system for the color which is being used for coating from a circuit charged with a high voltage, so as to

avoid any influence of the high voltage, so that works such as coating material supplement and maintenance can be done while the coating is performed: and which realizes easy color changing.

In order to solve the above-described problems, the present invention provides the following method. In a color changing apparatus for multiple color electrostatic coating of conductive coating material, a pipe joint provided to be movable on a guide rail and an electrostatic spray gun connected to the pipe joint **a** through a pipeline are provided. A plurality of coating material supply circulation circuits, including a liquid tank, a pump and a pipe joint **b** disengageably engageable with the pipe joint **a** are provided. The liquid tank, the pump and the pipe joint **b** are connected through a pipeline. The pipe joint **a** and the pipe joint **b** in the plurality of coating material supply circulation circuits can be selectively disengaged.

### **Brief Description of the Drawings**

The invention may take physical form in certain parts and arrangements of parts, preferred embodiments and a method of which will be described in detail in this specification and illustrated in the accompanying drawings which form a part hereof, and wherein:

Figure 1 is a schematic front view illustrating an exemplary color changing apparatus for multiple color coating according to the present invention; and

Figure 2 is a schematic side view of Figure 1.

### **Description of the Reference Numerals]**

1 ... guide rail; 2 ... pipe joint **a**; 3 ... actuator, 4 ... electrostatic spray gun; 11 liquid tank; 12 ... pump; 13 ... pipe joint **b**; 14 ... actuator; 16 ... pressure adjusting valve; 22 ... subject of coating.

### **Detailed Description of the Preferred Embodiments**

Hereinafter, embodiments of the present invention will be described with reference to Figures 1 and 2. According to the present invention, a plurality of coating material supply circulation circuits, i.e., the plurality of coating material supply circulation circuits including a liquid tank, a pump and a pipe joint **b** which are connected through a pipeline can be started, stopped and otherwise operated. A pipe joint **a** provided to be movable on a guide rail and an electrostatic spray gun are connected to each other via a one-way pipeline.



Accordingly, the coating material supply circulation circuit associated with the pipe joint **b** engaged with the pipe joint **a** is influenced by a high voltage applied to the electrostatic spray gun through the conductive coating material. The other coating material supply circulation circuits are not influenced by the high voltage since the conductive path is completely disconnected between the pipe joint **a** and the pipe joint **b**. Therefore, even while coating is performed, the coating material supply circulation circuits which are not used can be supplemented with a coating material, even a highly conductive coating material, or subjected to maintenance.

Before changing colors, one of the liquid tanks (for example, tank D) can be filled with a cleaning liquid, and the pipe joint **b** in the circulation circuit of the liquid tank D, and the pipe joint **a** can be connected to each other while color A is replaced with color B. Thus, the flow system from the pipe joint **a** to the electrostatic spray gun connected to the pipe joint **a** through the pipeline is grounded and cleaned by the cleaning liquid. Accordingly, a color changing operation can be performed easily without color mixture.

Hereinafter, examples of the color changing apparatus for multiple color electrostatic coating of conductive coating material according to the present invention will be described by way of drawings. Figure 1 is a schematic front view illustrating a structure of an exemplary color changing apparatus for multiple color electrostatic coating of conductive coating material according to the present invention; and Figure 2 is a schematic side view of Figure 1.

In the figures, reference numeral 1 represents a guide rail which can be fixed on a support or a wall; reference numeral 2 represents a movable coupling or pipe joint **a** provided to be movable on the guide rail 1. The movable coupling, or pipe joint **a** 2 is movable on the guide rail 1 by a drive, such as an actuator 3. In this example, a mechanical drive in the form of a hydraulic operable cylinder is used as the actuator 3, but the drive or actuator can be of other known systems such as an electric system. Reference numeral 4 represents a spray device, such as an electrostatic spray gun having a valve mechanism inside. The spray device, or electrostatic spray gun 4, is connected to a high voltage power supply 5 through a cable 6. A high voltage (80 to 125 kV) is applied to a corona pin in the electrostatic spray gun 4 to supply an electrostatic charge to coating material discharged from the spray gun, as desired. The pipe joint **a** 2 and the electrostatic spray gun 4 are connected to each other through a supply line, or pipeline, 7. When connecting the pipeline 7 and the pipe joint **a** 2, the pipe joint **a** 2 moves. It is required they are connected so as not to disturb the movement. Providing a flexible hose or the like may be a simple way to realize this.

In this example, two electrostatic spray guns 4 are provided. The number of the electrostatic spray guns 4 is not limited to two and can be any number in accordance with the conditions of the shape, size and the like of the subject of coating. When a plurality of electrostatic spray guns 4 are provided, each of the electrostatic spray guns 4 is preferably provided with a flow rate adjusting valve 8 in order to allow the balance of the amounts of the coating material from the electrostatic spray guns 4 to be adjusted. Reference numeral 9 represents a dump valve; and reference numeral 10 represents an exhaust liquid receptacle. The dump valve 9 and the exhaust liquid receptacle 10 are used for cleaning the inside of the pipeline 7. In the case where the exhaust liquid is recovered in an external recovering container (drum or the like) although not shown, a dump shuttle, or voltage block, may be provided to completely electrically insulate the external recovering container from the systems.

Reference numeral 11 represents a coating material source or liquid tank for the coating material (one of them is used for the cleaning liquid). A plurality of coating material sources, or liquid tanks 11, are provided. Four such sources are indicated in the drawings with reference numerals 11 and representing colors A, B, C and D. Reference numeral 12 represents a pump located above the liquid tank 11. Reference numeral 13 represents a coating material coupling, or pipe joint, **b**. Either one of the pipe joint **b** 13 and the pipe joint **a** 2 is male and the other is female so that they are disengageably engaged, or selectively engaged, with each other. The pipe joint **a** 2 and the pipe joint **b** 13 are provided with an internal check valve mechanism for allowing the liquid to flow only when the pipe joint **a** 2 and the pipe joint **b** 13 are engaged with each other and automatically closing the liquid path when the pipe joint **a** 2 and the pipe joint **b** 13 are disengaged from each other. In one embodiment of the invention, the pipe joint **b** 13 is connected to the actuator 14 for performing engagement and disengagement by an electrically insulating material 15 which is interposed therebetween. In this example, a hydraulic cylinder mechanism is used as the actuator 14. Of course, an engagement drive, such as a hydraulic cylinder (not shown) can be connected to movable coupling, or pipe joint **a** 2 to selectively, or disengageably, engage with one of the pipe joints **b** 13. Alternatively, and also not shown, the movable pipe joint **a** 2 can selectively engage with one of the pipe joints **b** 13 only when properly positioned, and disengage when not so positioned thereby sealing both pipe joints **a** 2, **b** 13. The pipe joint **b** 13 is automatically grounded by a ground wire at the lowest point where the pipe joint **b** 13 is disengaged from the pipe joint **a** 2. Reference numeral 16 represents a pressure adjusting valve, and reference numeral 24 represents a circulation valve.

These devices, i.e., the liquid tank 11, the pump 12, the pipe joint b 13, the pressure adjusting valve 16, and the circulation valve 24 are connected through supply lines, or pipelines 17 and 18 to form the coating material supply circulation circuit. That is, the conductive liquid coating material stored in the liquid tank 11 is pumped up by the pump 12 and flows from the coating material supply line, or pipeline, 17 to the pipe joint b 13, and then flow through the pipeline 18, the pressure adjusting valve 16 and the circulation valve 24. Then, the conductive liquid coating material returns to the suction side of the pump 12. A part of the conductive liquid coating material returns to the liquid tank 11. During this procedure, the pressure in the coating material supply circulation circuit is maintained at a prescribed level by the pressure adjusting valve 16.

When connecting the pipelines 17 and 18 and the pipe joint b 13, the pipe joint b 13 moves up and down in the illustrated embodiment. It is required they are connected so as not to disturb the movement. Providing a flexible hose or the like may be a simple way to realize this. Reference numeral 19 represents an insulating material for electrically insulating the liquid tank 11. The coating material supply circulation circuit may undesirably have residual high potential electrostatic charges even after the pipe joint a 2 and the pipe joint b 13 are separated from each other. The liquid tank 11 is connected to the relay 20 and a grounding circuit 21 for grounding and releasing the electrostatic charges remaining in the coating material supply circulation circuit at the time of maintenance. The relay 20 and the grounding circuit 21 cooperate with the ground wire 23 to form a double safe mechanism. A voltage block is thereby formed which electrically isolates the liquid tank from ground while that liquid tank is being used in a conductive coating operation and isolates the liquid tank from the spray gun while not being used to transmit coating material for a coating operation. Reference numeral 22 represents a grounded subject of coating.

In this example, the apparatus includes three coating material supply circulation circuits including the liquid tank 11, the pump 12, the pipe joint b 13, the pressure adjusting valve 16 and the circulation valve 24 which are connected through the pipelines 17 and 18, for convenience. The number of the supply circulation circuits is not limited to three and can be any number in accordance with the number of colors required.

Next, the function of the color changing apparatus for electrostatic coating will be described. First, the liquid tanks 11 are respectively filled with conductive coating materials A, B and C of different colors. The tank D is assumed to be filled with a cleaning liquid for convenience, in order to wash the coating material flow path when the colors are changed. Herein, an example in which coating material A shown in Figure 1 is applied will be

described for convenience. Coating materials of other colors are applied in a similar manner. The actuator 3 is operated to position the pipe joint **a** 2 so as to be engaged with the pipe joint **b** 13 of the coating material supply circulation circuit for an intended color (color A of Figure 1). Then, the actuator 14 is operated to engage the pipe joint **a** 2 with the pipe joint **b** 13. Then, the high voltage power supply 5 is started and the corona pin of the electrostatic spray gun 4 is supplied with a high voltage. At this point, the dump valve 9 is closed.

When the pump 12 for color A is started, the conductive liquid coating material A stored in the liquid tank 11 is pumped up by the pump 12 and circulates in the coating material supply circulation circuit, which passes from the pipeline 17 to the pipe joint **b** 13, then flows through the pipeline 18, the pressure adjusting valve 16 and the circulation valve 24, and returns to the suction side of the pump 12 or the liquid tank 11. Conductive liquid coating material A maintained at the prescribed pressure also flows from the pipe joint **b** 13 through the pipe joint **a** 2, the pipeline 7 and the flow rate adjusting valve 8 to reach the electrostatic spray gun 4. When the valve mechanism incorporated in the electrostatic spray gun 4 is opened, coating material A is sprayed from the nozzle of the electrostatic spray gun 4 and applied on the surface of the target of coating which is grounded.

The high pressure applied to the electrostatic spray gun 4 influences all the devices in the coating material supply circulation circuit in the system of coating material A, in which the conductive path is formed through the conductive coating material A. Accordingly, all the devices in which the conductive path is formed need to be maintained in an insulating state. Although not shown, the devices need to be enclosed by a protection fence or the like so as to prevent the operator from inadvertently contacting the devices in Figure 1, in order to maintain all the devices in an insulating state, the entire system is maintained in an insulating state by the relay 20 of the grounding circuit 21 which is opened, separation of the pipe joint **b** 13 from the ground wire 23 as a result of elevation of the actuator 14, and the insulating material 19 provided in the liquid tank 11. While coating is performed with coating material A, the supply circulation circuits for coating material B, coating material C and the cleaning liquid D other than coating material A are completely separated from the high voltage conductive path at the pipe joint **b** 13 and also are grounded by the grounding wire 23, the closed relay 20 and the grounding circuit 21. Thus, these supply circulation circuits other than the circuit for coating material A are not influenced by the high voltage.

Next, the process of color changing will be described. First, in order to avoid mixing of a color already used and a color to be used, the pipe joint **a**, the pipeline 7, the flow rate adjusting valve 8 and the electrostatic spray gun 4 need to be cleaned. Since the cleaning

operation does not need application of a high voltage, the high voltage power supply is disconnected before the cleaning operation starts. Then, the actuator 14 is operated to disengage the pipe joint a 2 from the pipe joint b 13. Since the pipe joint a 2 and pipe joint b 13 are provided with a check valve mechanism for preventing liquid leakage, the liquid does not leak.

Next, the actuator 3 is operated to position the pipe joint a 2 so as to be engaged with the pipe joint b 13 of the cleaning liquid supply circulation circuit connected to the tank D filled with the cleaning liquid. Then, the actuator 14 of the cleaning liquid supply circulation circuit D is operated to engage the pipe joint b 13 with the pipe joint a 2. When the dump valve 9 is opened to start the pump 12, coating material A remaining in the pipeline 7 is pushed out to the exhaust liquid receptacle 10. Thus, the pipeline 7 is cleaned. When the cleaning of the pipeline 7 is finished, the dump valve 9 is closed. When the valve mechanism incorporated in the electrostatic spray gun 4 is opened, the flow rate adjusting valve 8 and the electrostatic spray gun 4 are cleaned. After the cleaning of the flow rate adjusting valve 8 and the electrostatic spray gun 4 is finished, the valve mechanism incorporated in the electrostatic spray gun 4 is closed. Thus, the cleaning operation is completed.

Next, the pipe joint a 2 engaged with the supply circulation circuit for the cleaning liquid D is separated from the pipe joint b 13. The pipe joint a 2 is moved to be engaged with the pipe joint b 13 of the coating material supply circulation circuit for coating material B, and the pump 12 for coating material B is started to supply coating material B to the electrostatic spray gun 4. Thus, the color changing from coating material A to coating material B is completed. A high voltage is applied to the electrostatic spray gun 4 to open the valve mechanism inside the electrostatic spray gun 4. Thus, coating material B is applied to the subject 22 of coating.

By structuring the coating material supply system to be a circulation circuit having the pipe joint b 13, the pipelines can be engaged or disengaged at one pipe joint, which is significantly simpler than in the conventional structures. The circulation circuits, other than the circulation circuit which is selected and being used (i.e., the circulation circuit having the pipe joint b 13 which is engaged with the pipe joint a 2), are completely separated from the high voltage power supply at the pipe joint b 13 and grounded. Accordingly, these circulation circuits can be supplemented with the coating material or subjected to maintenance even while the apparatus is in operation without being influenced by the high voltage. Since electrostatic charges may undesirably remain from before the separation at the pipe joint b

13, the relay 20 needs to be closed to release the remaining electrostatic charges through the grounding circuit 21 before the maintenance is started.

As described above, a color changing apparatus for multiple color electrostatic coating of conductive coating material according to the present invention provides relatively simpler structure and operation than the prior art apparatuses. The apparatus is structured so that the coating material color supply systems other than the system for the color which is in use are completely separated from the circuit charged with a high voltage and thus are not influenced by the high voltage. Thus, even while the coating is performed, supplementing of the coating material and maintenance can be done. The color changing operation is facilitated.

09990027 072404

APR. 17. 2001 4:47PM

CALFEE HALTER &amp; GRISWOLD LLP

NO. 7593 P. 5

Claims

We claim:

1. A color changing apparatus for multiple color coating of conductive coating material, wherein a pipe joint a2 is provided to be movable on a guide rail 1 and an electrostatic spray device 4 connected to the pipe joint a2 through a pipeline 7 are provided; a plurality of coating material supply circulation circuits are provided, each including a liquid tank 11 for holding a coating material source, a pump 12 and a pipe joint b13 disengageably engaged with the pipe joint a2, the liquid tank 11 and the pump 12 and the pipe joint b13 being connected through a pipeline; and the pipe joint a2 and the pipe joint b13 in the plurality of coating material supply circulation circuits are selectively disengaged from each other.
2. The apparatus of claim 1 wherein at least one of said liquid tanks 11 is for holding a source of electrically conductive, coating material, said at least one liquid tank is selectively insulable from ground.
3. The apparatus of claim 2 further comprising a power supply 5 for applying an electric charge to said electrically conductive coating material discharged from said spray device 4 and a voltage block which electrically isolates said liquid tank which is transmitting the electrically conductive coating material to said spray device from electrical ground.
4. The apparatus of claim 3 wherein said voltage block electrically isolates from said spray device 4 said liquid tanks which are not transmitting coating material to said spray device.
5. The apparatus of claim 1 further comprising a relay for each of said supply circulation circuits, wherein each of the liquid tanks is selectively electrically insulable from ground and selectively groundable.
6. The apparatus of claim 1 further comprising a drive for moving the guide rail.
7. The apparatus of claim 6 wherein the drive comprises a hydraulic operable cylinder.
8. The apparatus of claim 1 further comprising a check valve for each of said pipe joints,

03850027-072401

APR. 17. 2001- 4:48PM

CALFEE HALTER &amp; GRISWOLD LLP

NO. 7593 P. 6

such that coating material flow is allowed when the pipe joint a2 is connected with a respective said pipe joint b13 and coating material flow is automatically stopped when the respective connected pipe joints a2, b13 are disconnected.

9. The apparatus of claim 1 wherein each supply circulation circuit further comprises a pressure adjusting valve and circulation valve.

10. In a coating system having a plurality of sources of different coating materials, wherein at least one of said coating materials is electrically conductive, a corresponding plurality of coating material couplings each one of which is connected to a respective one of said plurality of sources of different coating materials, an electrostatic spray device, and a movable coupling connected to said spray device, a method for supplying coating material from one of said sources to said spray device and electrically charging said coating material discharged from said spray device, comprising the steps of:

supplying coating material from a first source of coating material to a first coating material coupling connected with said first source;

moving said movable coupling to first position wherein said movable coupling is engaged with said first coating material coupling to permit coating material to be transmitted from said first source through said movable coupling;

supplying coating material from said movable coupling to said spray device;

electrically isolating said first source of coating material from electrical ground while coating material is being transmitted from said first source to said spray device; and charging said coating material discharged from said spray device.

11. The method of claim 10, further comprising the steps of:

terminating the transmission of coating material from said first source to said spray device;

disengaging said movable coupling from said first coupling;

cleaning said movable coupling and said spray device of residual coating material from said first source of coating material;

moving said movable coupling to a second position wherein said movable coupling is engaged with a second coating material coupling which is connected to a second source of coating material; and

transmitting coating material from said second source of coating material to said



17-04-2001

APR. 17. 2001 4:48PM

CALFEE HALTER & GRISWOLD LLP

US 000003926

NO. 7593 P. 7

spray device while electrically isolating said second source of coating material from electric ground while ensuring said first source is electrically grounded.

09:00:27 07/10/2001

09/890027


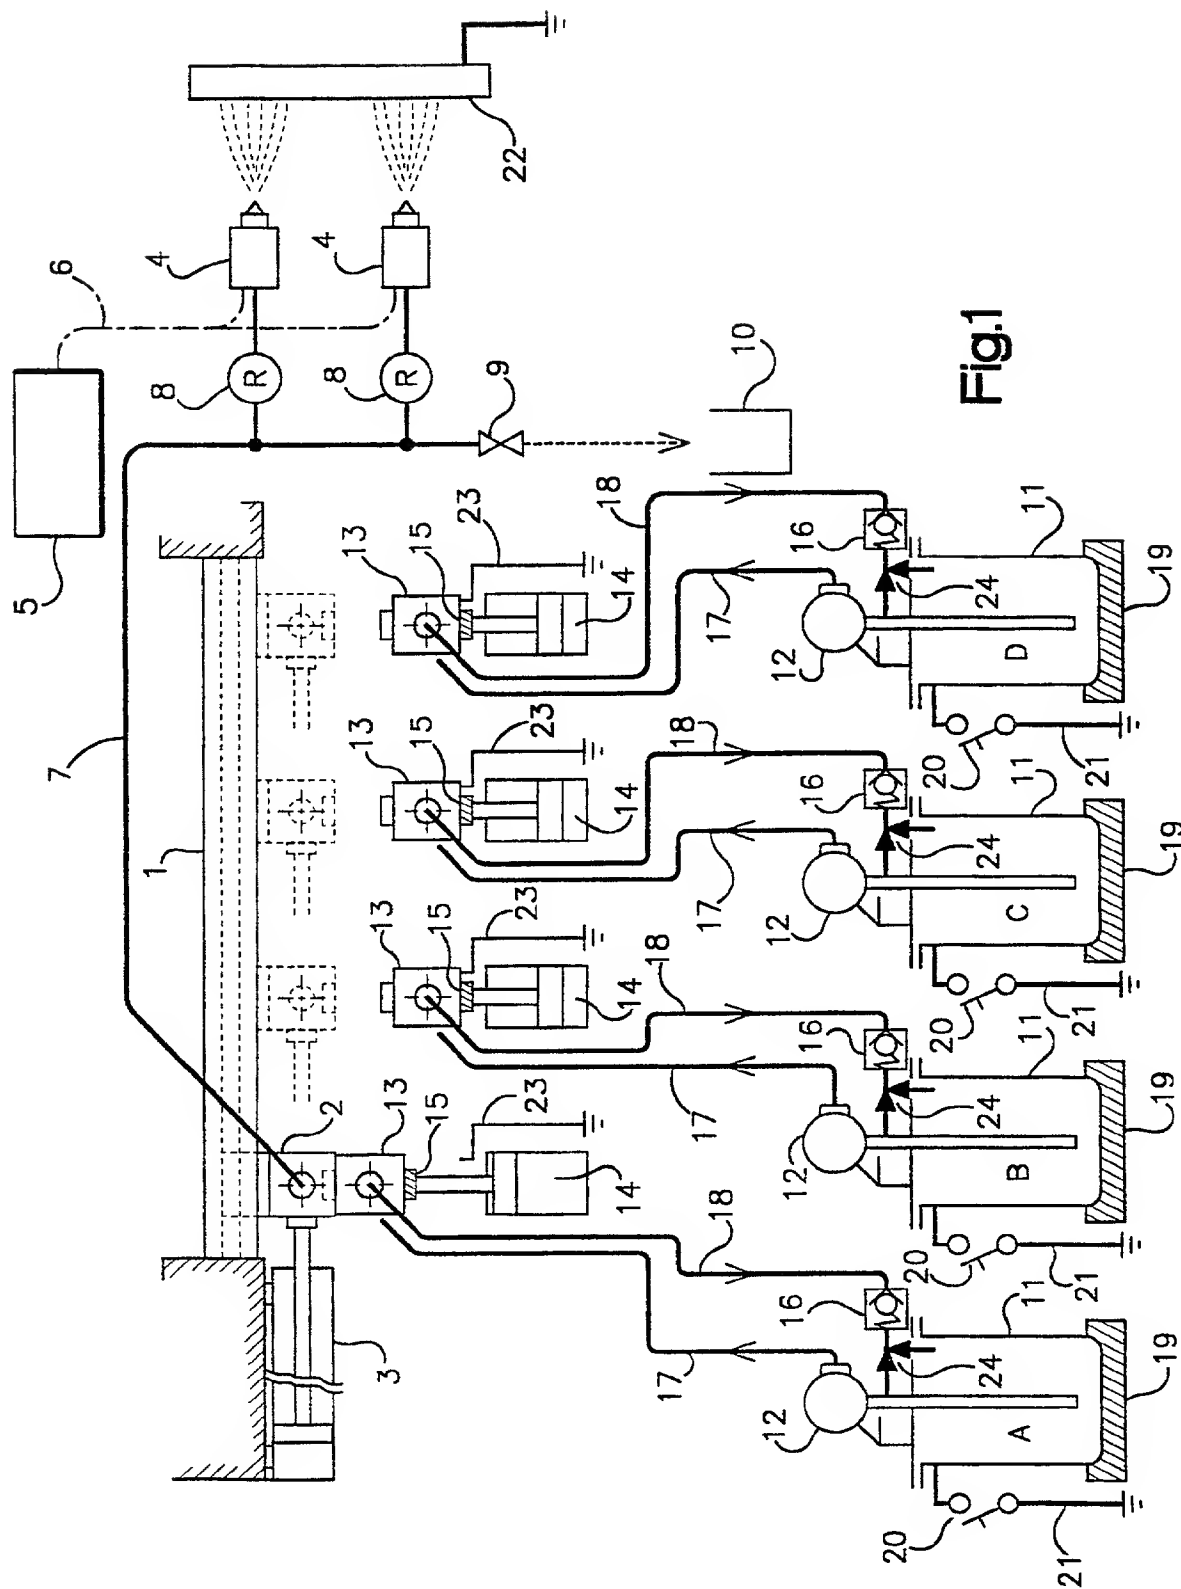


Fig.1

FIG. 1

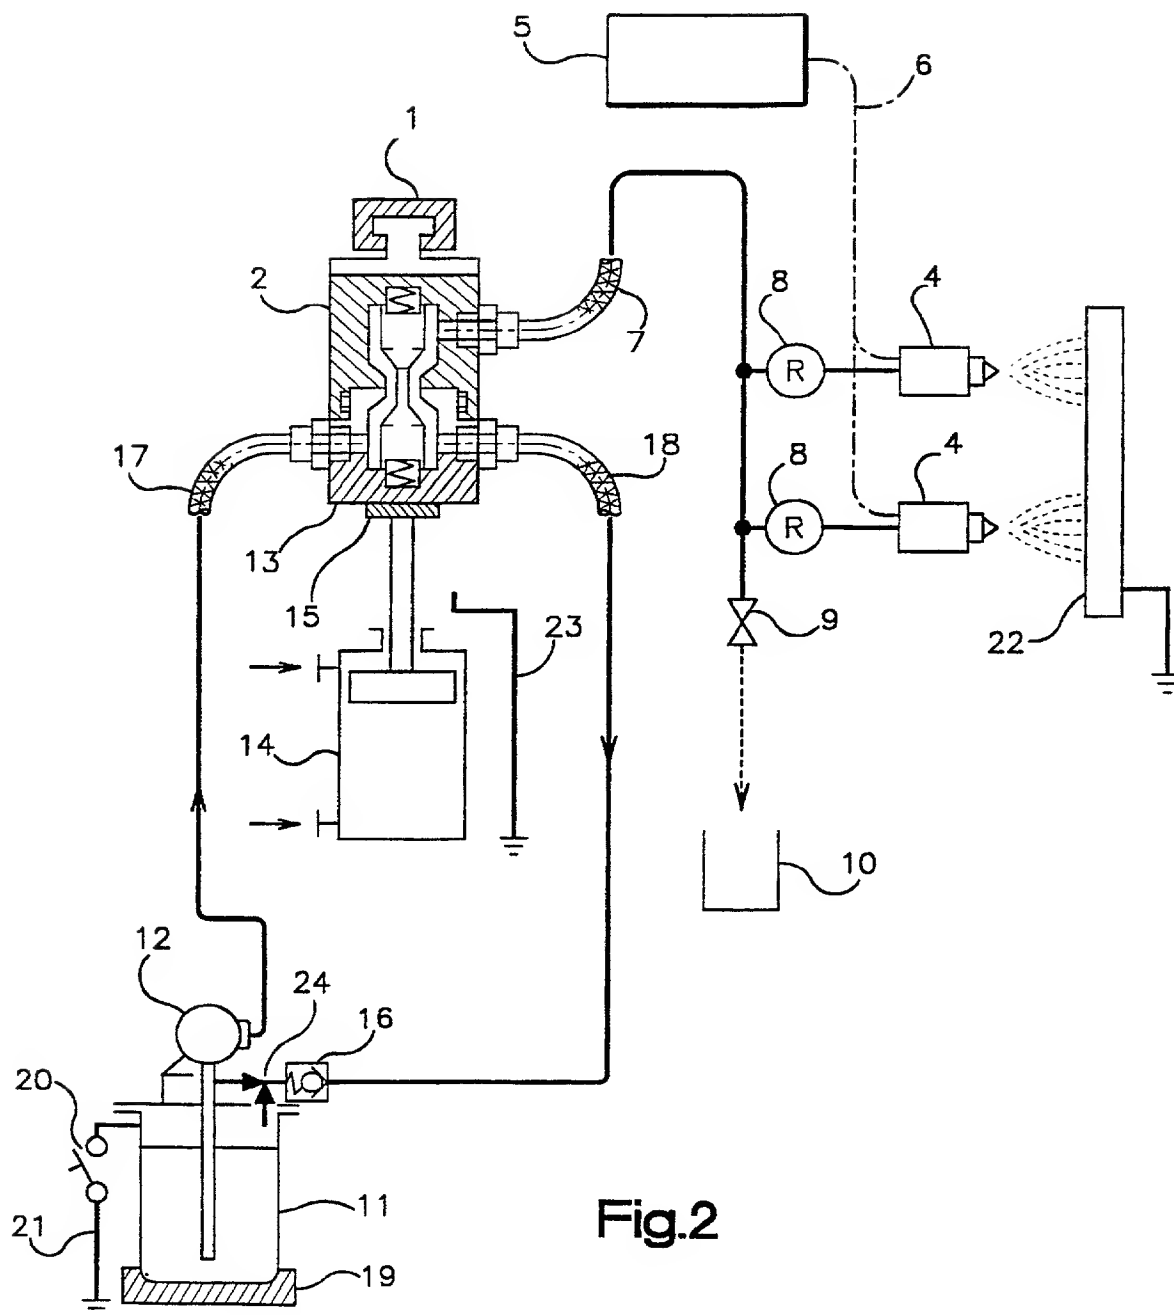

## Declaration and Power of Attorney For Patent Application

## 特許出願宣言書及び委任状

## Japanese Language Declaration

## 日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

MULTI COLOR CHANGE DEVICE OF  
CONDUCTIVE COATING MATERIAL  
FOR ELECTROSTATIC COATING

上記発明の明細書（下記の欄でx印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約  
国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。☒ was filed on HEREWITH  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

Express Mail Label No. EL085010085US

私は、特許請求範囲を含む上記訂正後の明細書を検討し、  
内容を理解していることをここに表明します。I hereby state that I have reviewed and understand the contents of  
the above identified specification, including the claims, as  
amended by any amendment referred to above.私は、連邦規則法典第37編第1条56項に定義されると  
おり、特許資格の有無について重要な情報を開示する義務が  
あることを認めます。I acknowledge the duty to disclose information which is material to  
patentability as defined in Title 37, Code of Federal Regulations,  
Section 1.56.

Japanese Language Declaration  
(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基き下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基き国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

11-076290

(Number)  
(番号)

Japan

(Country)  
(国名)

(Number)  
(番号)

(Country)  
(国名)

私は、第35編米国法典119条(e)項に基いて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、下記の米国法典第35編120条に基いて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基き権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

Exp Mail Label No.

085010085US

(Application No.)  
(出願番号)

Herewith

(Filing Date)  
(出願日)

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じていることに基き表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基き、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の表明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT international application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed  
優先権主張なし

15 Feb. 1999

(Day/Month/Year Filed)  
(出願年月日)

(Day/Month/Year Filed)  
(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)  
(出願番号)

(Filing Date)  
(出願日)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

Pending -- new application

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)  
(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の  
手続を米特許商標局に対して遂行する弁理士または代理人  
として、下記の者を指名いたします。(弁理士、または代理  
人の氏名及び登録番号を明記のこと)

Leonard L. Lewis, Reg. No. 31,176; June E. Rickey, Reg. No. 40,144  
Ronald D. Gutt, Reg. No. 43,650

POWER OF ATTORNEY: As a named inventor, I hereby appoint  
the following attorney(s) and/or agent(s) to prosecute this  
application and transact all business in the Patent and Trademark  
Office connected therewith (list name and registration number)

書類送付先

Send Correspondence to:

~~Ronald D. Gutt~~  
Galfee, Halter & Griswold LLP  
800 Superior Ave, Suite 1400  
Cleveland OH 44114

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Ronald D. Gutt  
(216) 622-8690

唯一または第一発明者名

Full name of sole or first inventor

Shigefu Kobayashi

発明者の署名

日付

Inventor's signature

Date

住所

Residence 8-41-9, Asumigaoka, Midori-ku  
Chiba-city, Chiba, 267-0066, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address 8-41-9, Asumigaoka, Midori-ku  
Chiba-city, Chiba, 267-0066, Japan

第二共同発明者

Full name of second joint inventor, if any

Hidetaka Tsukamoto

第二共同発明者

日付

Second inventor's signature

Date

住所

Residence 7-41 Koizumikoso, Betsuin-cho,  
Kameoka-city, Kyoto, 621-0101, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address 7-41 Koizumikoso, Betsuin-cho,  
Kameoka-city, Kyoto, 621-0101, Japan

(第三以降の共同発明者についても同様に記載し、署名をす  
ること)

(Supply similar information and signature for third and subsequent  
joint inventors.)

PTO/SB/106 (8-96)  
Approved for use through 9/30/98. OMB 0651-0032  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## Japanese Language Declaration

(日本語宣言書)

委任状: 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁理士、または代理人の氏名及び登録番号を明記のこと)

Leonard L. Lewis, Reg. No. 31,176; June E. Rickey, Reg. No. 40,144

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (first name and registration number)

Ronald D. Gutt, Reg. No. 43,650

書類送付先

Send Correspondence to:

Ronald D. Gutt  
Calfee, Halter & Griswold LLP  
800 Superior Ave, Suite 1400  
Cleveland OH 44114

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Ronald D. Gutt  
(216) 622-8690

唯一または第一発明者名

Full name of ~~sole or first inventor~~ third inventor

Nobuo Ikeda

発明者の署名

日付

Inventor's signature

Date

住所

Residence

2-22-3-C101, Kamata, Ota-ku,  
Tokyo, 144-0052, Japan

国籍

Citizenship

Japan

私書箱

Post Office Address

2-22-3-C101, Kamata, Ota-ku,  
Tokyo, 144-0052, Japan

第二共同発明者

Full name of second joint inventor, if any

第二共同発明者

日付

Second inventor's signature

Date

住所

Residence

国籍

Citizenship

私書箱

Post Office Address

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)